
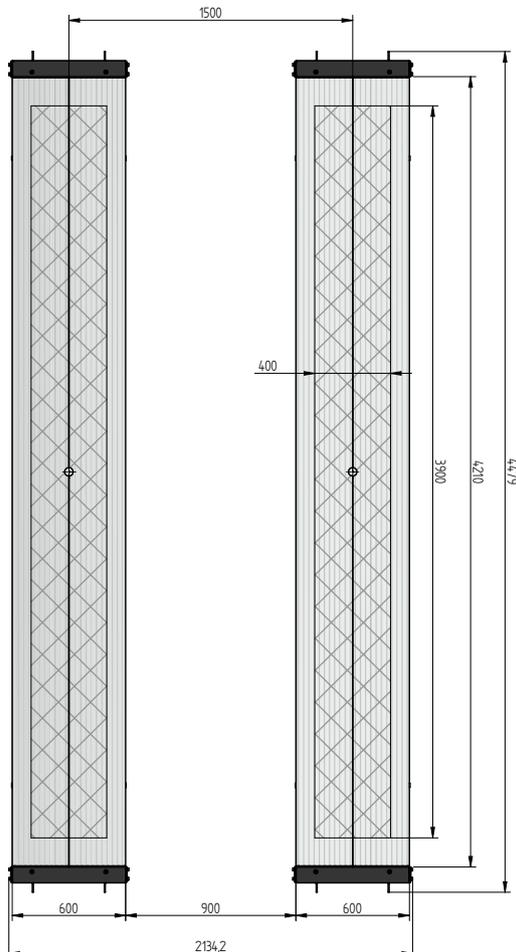


INGROUND 2-PISTON LIFT

TOP LIFT 2.35 TLA

SURFACE MOUNTED

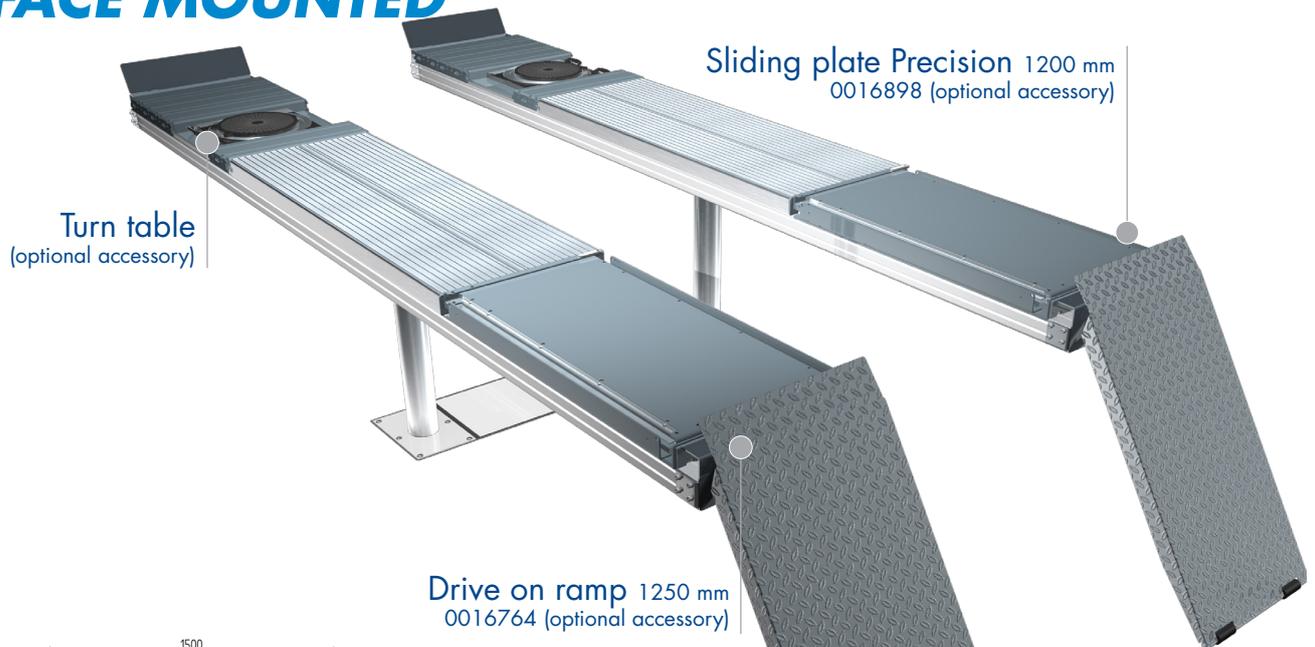

TECHNICAL DATA

capacity	3500	kg
effect. raise height	2008	mm
platform length	4400	mm
platform height	180	mm
piston diameter	123	mm
piston distance	1500	mm
installation depth	2443	mm
motor output	3,0	kW
power connector	400 V/16 A	
cable length to control	11	m
lifting time	≈ 35	sec.
lowering time	≈ 35	sec.

Platform 2.35 TLA with platform notches for turn tables and sliding plates	0016891
Platform 2.35 TLA	0016890
Installation cassette 1500 mm	0016892
Lifting unit 3,5 t 1500 mm - K pre-assembled in installation cassette	0016887




ACCESSORIES



Drive on ramp
1250 mm
0016764



Drive on stop
0016765



Sliding plate
Precision 1200 mm
0016898




Lighting
LED
0016900



Slide rail
4400 mm
0016899




Axle Jack 2600 kg
pneumatisch, ohne Laufschienen
0016767

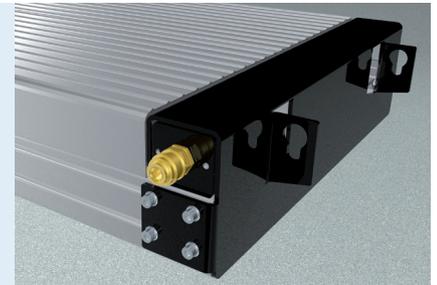

Compressed air supply
0016769



Wheel alignment supports
telescopic
0016771

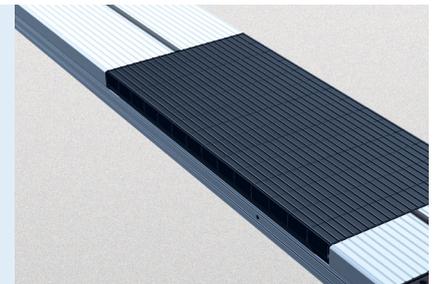

Rubber elements
50 mm 100 mm 200 mm
0017298 0017299 0017300