



SMART LIFT

3000 KG | 3500 KG | 4000 KG

Flexible: baseless design, adjustable height of the cable bridge, alternatively cable routing inground through empty pipe provided by the customer, ideal for low ceiling heights

An unrivalled range of support arm variants and the widest lifting range for complete **flexibility** and **EV compatibility**

Finely adjustable pickup pads with **additional quick-adjustment** mechanism

CE-Stop preinstalled on all versions, no hang-in foot protectors needed

LIFTING ARM VERSIONS

DT (2-times telescopic arms)

The short lifting arm has 2-times telescopic, providing a large adjustable range and therefore enables to lift small and wide vehicles.

MM (Mini-Max Lifting Arms)

Adapter for deep drawn side skirt and off-road vehicles. Quick vertical multilevel adjustment, hand and foot operated

SC (Sports Car-arms)

Extremely flat and sturdy arms made of solid material enable the lifting of very low and wide sports cars.

OTTO (Double-jointed arms)

For flexible pick-up of various cars. Very good accessibility to the sill and interior due to arm positioning under the vehicle.

EV (Electric Vehicle arms)

Front part of the arms can be swivelled by 180° for optimum flexibility and underbody clearance for electric vehicles.


UNI (Universal 3 stage arms)

Extended 3 stage lifting arms for lifting cars and vans up to MERCEDES Sprinter with long wheelbase on alternative pick up points.

THE ORIGINAL NUSSBAUM LIFT

- Flexible in height: Ideal for low ceiling workshops
- Asymmetric lifting arms and carriages for optimal door clearance
- Suitable for a large range of vehicles
- Short lifting arms swivelling 180°
- Distance between the columns of min. 2560 mm
- Pick-up points starting at 75 mm
- Small footprint - Saves space

STURDY, RELIABLE AND READY

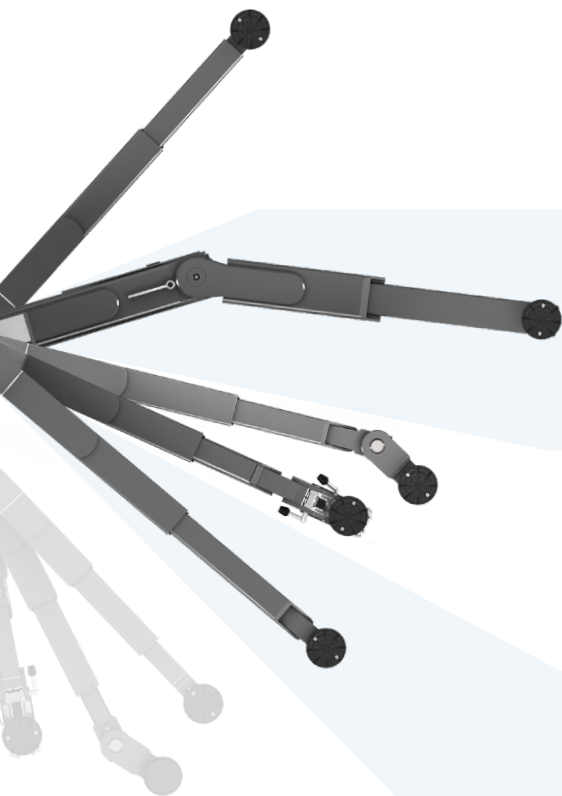

4000 KG



UNI - Arm


The perfect partner for the transporter workshop

OTTO 3500 KG



OTTO MM - Arm

Additional comfort with Mini-Max arms



OTTO - Arm

Perfect combination of double jointed and double telescopic arms

3500 KG



DT - Arm

Short arm has 2-times telescopic



MM - Arm

Ideal for deep drawn side skirt or off-road vehicles



SC - Arm

Extremely flat construction



EV - Arm

More flexibility for Electric Vehicles

3000 KG



DT - Arm

Short arm has 2-times telescopic

MAKE YOUR SMART CHOICE

MODEL	2.30 SL DT	2.35 SL DT	2.35 SL MM	2.35 SL SC	2.35 SL EV	2.40 SL UNI
Lifting capacity (kg)	3000	3500	3500	3500	3500	4000
Lifting/lowering time approx. (sec)	40 / 40	46 / 40	46 / 40	46 / 40	46 / 40	46 / 40
Lifting height (mm)	2010	2060	2045	1977	2014	2060
Lowest lifting point (mm)	95-140	102-166	75-185	84-144	107-171	115-190
Total height column (mm)	2890	2890	2890	2890	2890	2890
Top connection (mm)	3715-4165	3685-4170	3715-4115	3721-4172	3715-4115	3712-4172
Total width (mm)	3100	3230	3350	3350	3350	3350
Drive-through width (mm)	2310	2398	2518	2520	2498	2534
Column distance (mm)	2560	2646	2766	2762	2746	2766
Arm-extraction long (mm)	945-1495	940-1495	1000-1480	840-1380	956-1496	1130-1840
Arm-extraction short (mm)	480-870	570-1160	600-1000	590-865	608-1019	570-1160
Power supply (V / Hz / A)	400 / 50 / 16	400 / 50 / 16	400 / 50 / 16	400 / 50 / 16	400 / 50 / 16	400 / 50 / 16
Motor (kW)	2 x 1,5	2 x 1,5	2 x 1,5	2 x 1,5	2 x 1,5	2 x 1,5

ACCESSORIES



Pad extensions for the 3000 kg version



A full range of plug-in adaptors is available for loads from 3500 kg

**More
accessories
available**