Nussbaum

INGROUND 2-PISTON LIFT

TOP LIFT 2.65 TLK

SURFACE MOUNTED

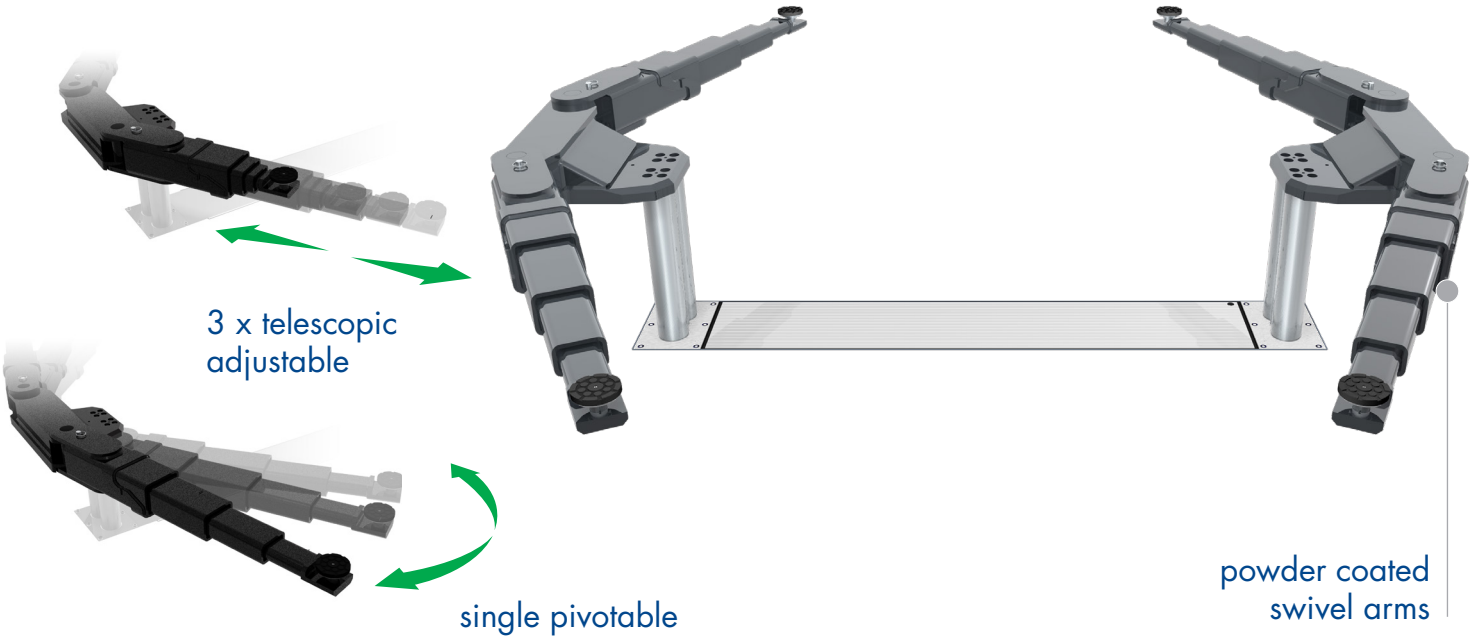

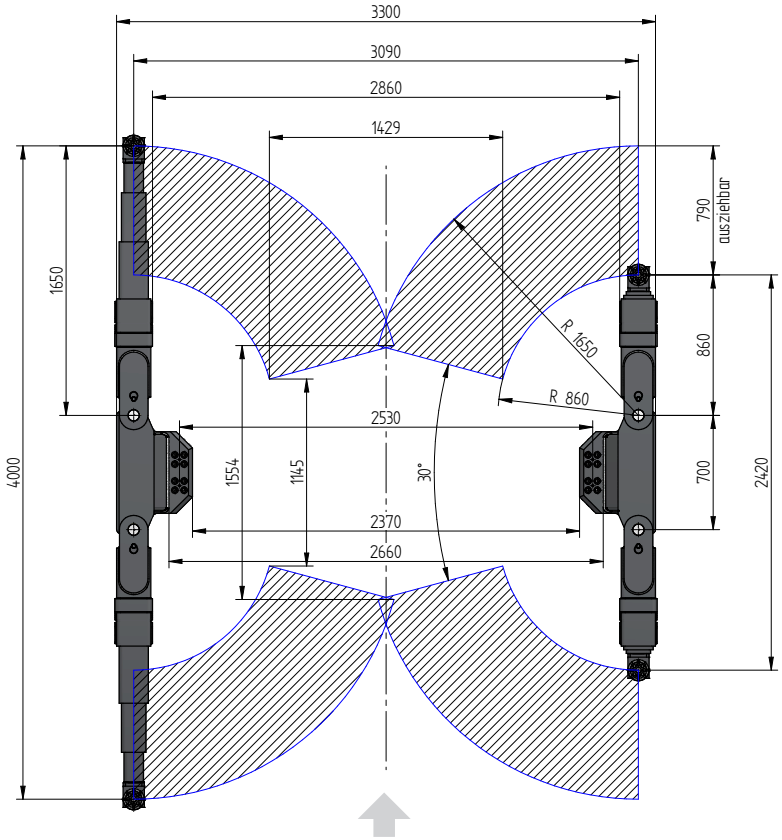

TECHNICAL DATA

Capacity	6500	kg
Effective raise height	2074	mm
Move in height	150	mm
Piston diameter	123	mm
Piston distance	2530	mm
Installation depth	2408	mm
Motor output	3,0	kW
Power connector	400 V/16 A	
Cable length to control	11	m
Lifting time	≈ 35	sec.
Lowering time	≈ 35	sec.

Arms 2.65 TLK	0016804
Installation cassette 2530 mm	0016268
Lifting unit 6,5 t 2530 mm - K pre-assembled in installation cassette	0016802

ACCESSORIES

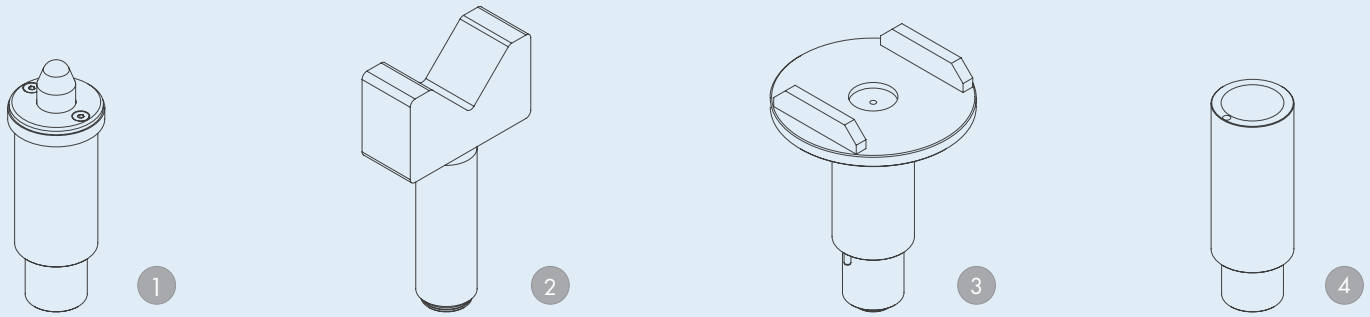

1 | Stacking adapter NCV3
d 45 x d 70 / 125-250 mm
0016743 (1set / 2 pcs.)

2 | Stacking adapter V-prism
d 45 / 182-312 mm
0016744 (1set / 2 pcs.)

3 | Stacking adapter U-form
d 130 x d 45 / 193-295 mm
0016745 (1set / 4 pcs.)

4 | Stacking adapter extension
130 mm
0016742 (1set/ 4 pcs.)



Bracket for stacking-adapter extension
0016751



Wheelfork adapter
0016753 (1Set / 4 Pieces)

Techn. Änderungen und Fehler vorbehalten. Gilt ab 01 2022 © Nussbaum Automotive Lifts GmbH | Korker Str. 24 | 77694 Kehl | Germany
Tel.: +49 (0) 7853 899 – 0 | Fax: +49 (0) 7853 8787 | info@nussbaumlifts.com | nussbaumlifts.com