Nussbaum

INGROUND 4-PISTON LIFT

# TOP LIFT 4.40 TLA

## BODENAUFLIEGEND

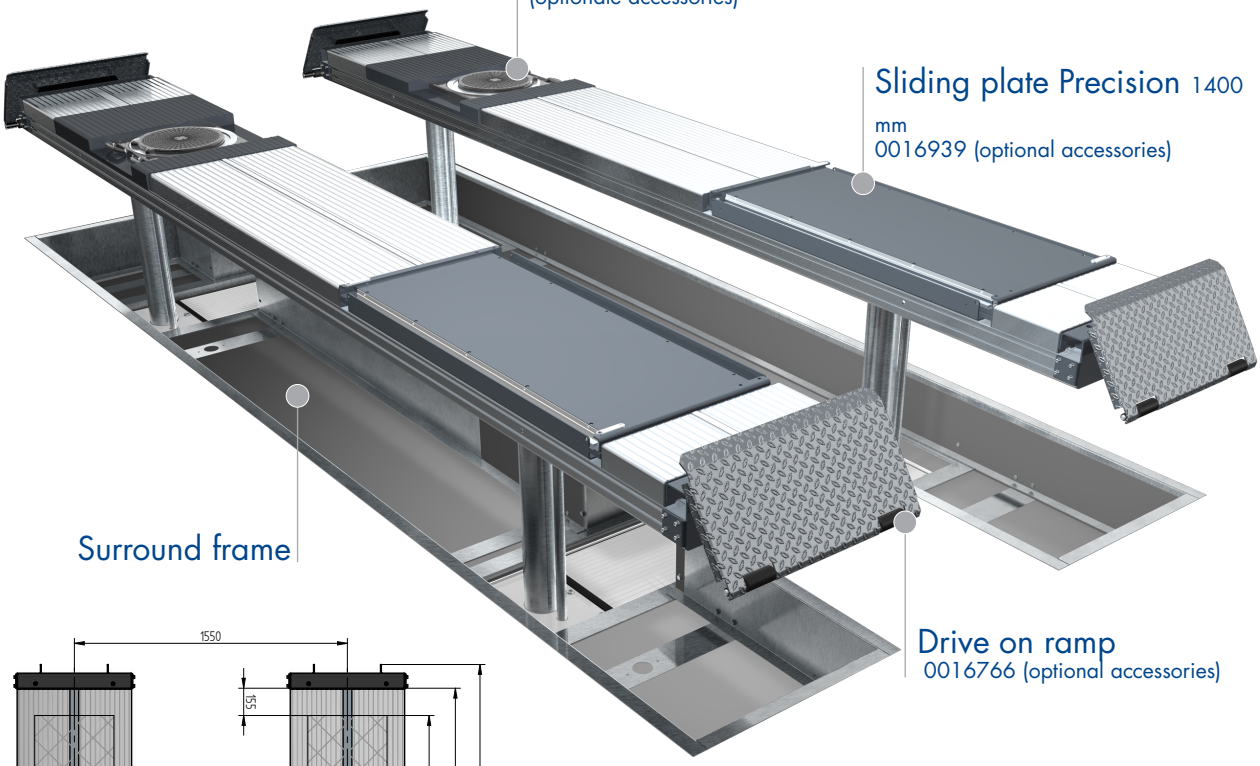


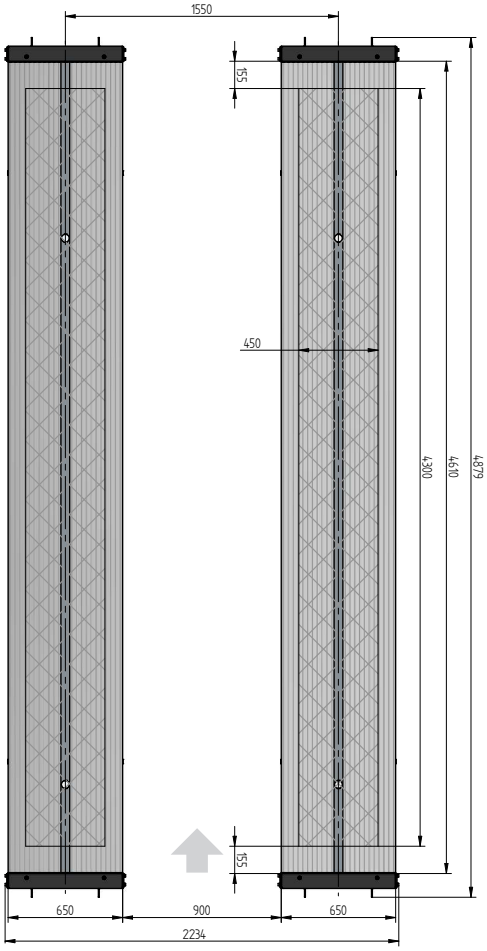


## TECHNICAL DATA

| | | |
|---|---|---|
| capacity | 4000 | kg |
| effect. raise height | 2008 | mm |
| platform length | 4800 | mm |
| platform height | 180 | mm |
| piston diameter | 123 | mm |
| piston distance | 1550 | mm |
| installation depth | 2443 | mm |
| motor output | 3,0 | kW |
| power connector | 400 V/16 A | |
| cable length to control | 11 | m |
| lifting time | ≈ 35 | sec. |
| lowering time | ≈ 35 | sec. |

| | |
|---|---|
| Platform 4.40 TLA<br>with platform notches for turn tables and sliding plates | 0016935 |
| Platform 4.40 TLA | 0016933 |
| Installation cassettes 1550 mm | 0016928 |
| Lifting unit 4,0 t 1550 mm - K<br>pre-assembled in installation cassette | 0016931 |
| Surround frame H 4800 mm | 0016894 |

# ACCESSORIES



## Drive on ramp
0016766



## Sliding plate
Precision 1400 mm
0016939



## Lighting
LED
0016903

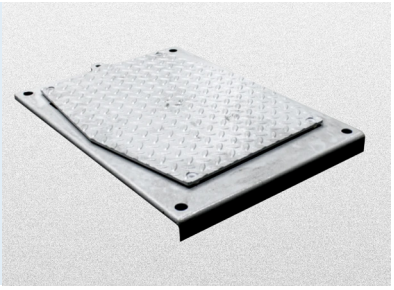

## Play detector

## Slide rail
4800 mm
0016911

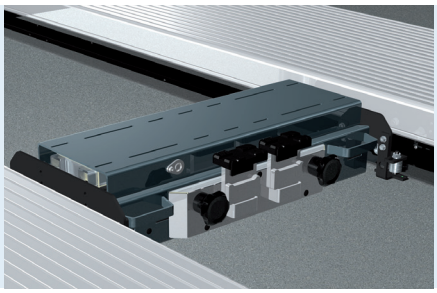

## Axle Jack 2600 kg
pneumatic, without slide rails
0016767



## Parkingposition
for axle jack
0016768

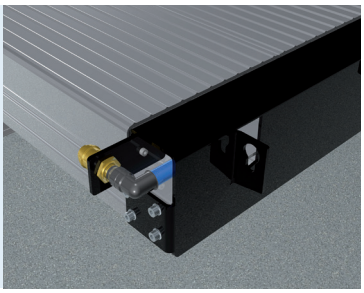

## Compressed air supply
0016770

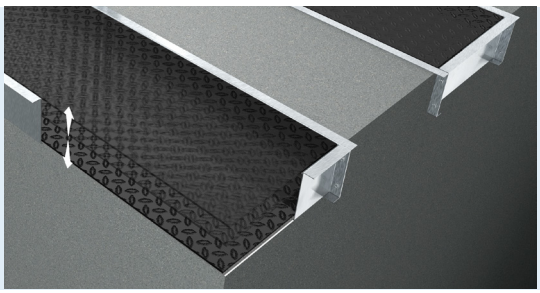

## Autom. floor levelling system
4-piston 4800 mm
0016936

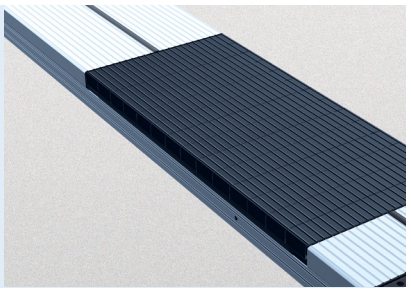

## Rubber elements
50 mm 0017301
100 mm 0017302
200 mm 0017303

Techn. Änderungen und Fehler vorbehalten. Gilt ab 01 2022 © Nussbaum Automotive Lifts GmbH | Korker Str. 24 | 77694 Kehl | Deutschland Tel.: +49 (0) 7853 899 – 0 | Fax: +49 (0) 7853 8787 | info@nussbaumlifts.com | nussbaumlifts.com